



## Profile for surface mounting Häfele Loox5, Profile 2101



- > Material: Profile: Aluminium, diffuser: Polycarbonate
- > Internal width: 11 mm
- > Diffuser width: 13 mm

### Note



For LED strip lights up to a width of 8 mm. The surface that is to be bonded must always be cleaned before bonding to the LED strip lights. It must be completely clean, grease-free and dust-free!

### Diffuser

The opal white diffuser creates a uniform light without points from 120 LEDs/ m. Points are visible with black version. If required, please order alternative diffusers in black or transparent separately.

### Supplied with

- 1 aluminium profile
- 1 diffuser opal white

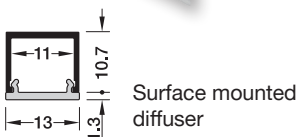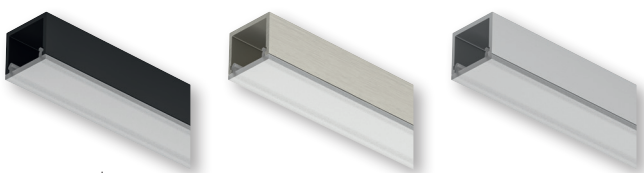


Colour/finish	Light permeability	2500 mm	3000 mm
Profile: Black, anodized, Diffuser: Opal white	60–70%	833.94.111	833.95.733
Profile: Stainless steel coloured, anodized, brushed, Diffuser: Opal white	60–70%	833.94.112	833.95.762
Profile: Silver coloured, anodized, Diffuser: Opal white	60–70%	833.94.110	833.95.732

Packing: 1 Piece

! Adhesive tape

► MB 2.95

## → End cap, for Häfele Loox5 profile for under mounting, profile 2101

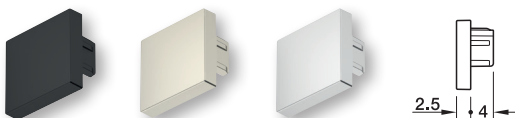

- > Material: Plastic
- > Equipment: With drill mark for cable outlet
- > Suitable for: Häfele Loox5 profile for under mounting, profile 2101


**Supplied with**  
5 pairs of end caps

Colour/finish	Cat. No.
Black	833.95.775
Stainless steel coloured, brushed	833.95.776
Silver coloured	833.95.774

Packing: 10 or 50 Piece

## → Diffuser Häfele Loox5

### Width 13 mm

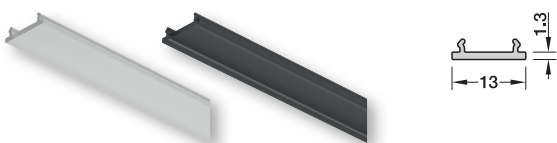

- > Material: Polycarbonate

### Note

The opal white diffuser creates a uniform light without points from 120 LEDs/ m. Points are visible with the black version.

**Supplied with**  
1 diffuser

Width mm	Diffuser colour/finish	Light permeability	2500 mm	3000 mm
13	Opal	60–70%	833.95.806	833.95.756
	Black	~ 20%	833.95.810	833.95.760

Packing: 1 or 25 Piece

DGH-M 2021, HDE-en, 10/20; Dimensional data not binding. We reserve the right to alter specifications without notice.