


6-way distributor, Häfele Loox5, 12 V, without switching function

5 12 V



Can also be connected to 6-way distributor

> Unswitched outputs with continuous current



- > Version: Without switching function
- > Material: Plastic
- > Colour/finish: Black
- > Inputs: 1 x plug, Loox5 2-pin 12 V
- > Outputs: 6 x sockets, Loox5 2-pin 12 V
- > Dim. (L x W x H): 70 x 30 x 14 mm


Supplied with
1 distributor

| Power loading capability W | Cat. No. |
|----------------------------|------------|
| 60 | 833.95.786 |

Packing: 1 piece

6-way distributor, Häfele Loox5, 24 V, without switching function

5 24 V



Can also be connected to 6-way distributor

> Unswitched outputs with continuous current



- > Version: Without switching function
- > Material: Plastic
- > Colour/finish: Black
- > Inputs: 1 x plug, Loox5 2-pin 24 V
- > Outputs: 6 x sockets, Loox5 2-pin 24 V
- > Dim. (L x W x H): 70 x 30 x 14 mm

Supplied with
1 distributor


| Power loading capability W | Cat. No. |
|----------------------------|------------|
| 120 | 833.77.839 |

Packing: 1 piece

Extension lead, Häfele Loox5, 5 A

For Loox5 monochrome lights and other 2-pin consumers (charging stations, audio) and distributors

5 12V 5 24V

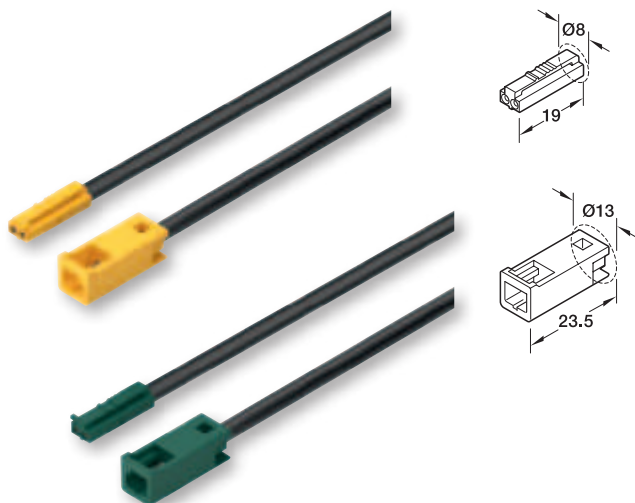

- > Current carrying capacity: 5 A
- > Wire cross section AWG: 18
- > Material: Plastic
- > Number of individual wires: 2
- > Plug drill hole Ø: 8 mm
- > Socket drill hole Ø: 13 mm

Note
Maximum lead length from the Loox5 driver to the consumer is 10 m. Loss of voltage in the cable due to long cable lengths in conjunction with large loads (strip light lengths). These lead to visible loss of brightness in the lights. The illuminance specified for the lights has been determined with the rated output voltage of the driver (12 V or 24 V).

Supplied with
1 extension lead plug/socket


| | Input ports | Outputs | 500 mm | 1000 mm | 2000 mm |
|-------|----------------------------|-------------------------------|------------|------------|------------|
| 5 12V | 1 x plug, Loox5 2-pin 12 V | 1 x sockets, Loox5 2-pin 12 V | 833.95.712 | 833.95.713 | 833.95.714 |
| 5 24V | 1 x plug, Loox5 2-pin 24 V | 1 x sockets, Loox5 2-pin 24 V | 833.95.719 | 833.95.718 | 833.95.717 |

Packing: 1 piece

Multi-white extension lead, Häfele Loox5, 3.5 A

for Loox5 multi-white lights

5 12V 5 24V

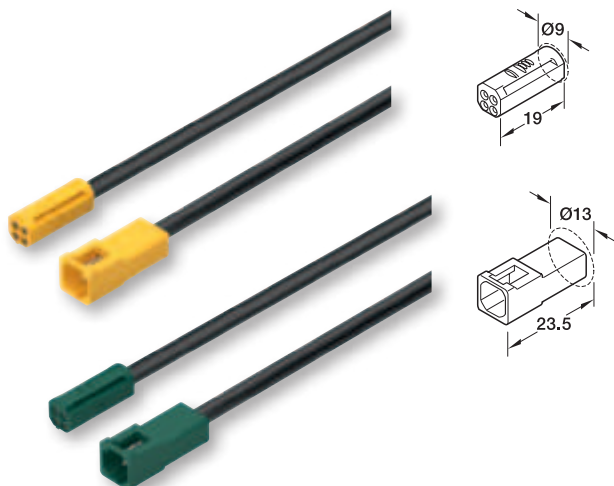

- > Current carrying capacity: 3.5 A
- > Wire cross section AWG: 20
- > Material: Plastic
- > Number of individual wires: 3
- > Plug drill hole Ø: 9 mm
- > Socket drill hole Ø: 13 mm

Note
Maximum lead length from the Loox5 driver to the consumer is 10 m. Loss of voltage in the cable due to long cable lengths in conjunction with large loads (strip light lengths). These lead to visible loss of brightness in the lights. The illuminance specified for the lights has been determined with the rated output voltage of the driver (12 V or 24 V).

Supplied with
1 extension lead plug/socket

| | Input ports | Outputs | Cable length mm | Cat. No. |
|-------|-------------------------------|----------------------------------|-----------------|------------|
| 5 12V | 1 x plug, Loox5 3-pin MW 12 V | 1 x sockets, Loox5 3-pin MW 12 V | 2000 | 833.95.715 |
| 5 24V | 1 x plug, Loox5 3-pin MW 24 V | 1 x sockets, Loox5 3-pin MW 24 V | 2000 | 833.95.720 |

Packing: 1 piece



2

12/24 V

DGH-M 2021, HDE-en, 10/20; Dimensional data not binding. We reserve the right to alter specifications without notice.